

CM403RA-S

12" LED SURFACE MOUNT
WITH DECORATIVE DOUBLE RING TRIM



Fixture Type
Project
Notes



The LED Surface Mount Downlight with Decorative Double Ring series is designed for residential and commercial applications. Its design features a contemporary double ring steel trimming in Brushed Nickel with only 3-3/4" in depth can easily be installed close-to-ceiling, and it is ADA compliant for Wall Mounting. Its Frosted Polycarbonate Diffuser provides comfortable non-glare lighting with no hot spots and Triac dimming.



SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	15 W
LUMENS	900 Lm
EFFICACY	60 Lm/W
CRI	90+
BEAM ANGLE	120°

DIMMING¹	TRIAC Dimming
ENVIRONMENT	Damp
CERTIFICATIONS	cETLus, T24 Compliant
LUMEN MAINTENANCE	50,000 hours
WARRANTY²	5 years

¹ Effectively dim down to 10% / See other compatible dimmers on the next page
² See published warranty terms for detailed information

PERFORMANCE

COLOR TEMPERATURE	LUMEN	WATTAGE	EFFICACY	CRI
3000K	900 Lm	15 W	60 Lm/W	90+
4000K	900 Lm	15 W	60 Lm/W	90+

ORDERING INFO

	MODEL CM403RA	SIZE S - 12"	CCT / CRI 3090 - 3000K / 90CRI 4090 - 4000K / 90CRI	TRIM FINISH BN - Brushed Nickel
--	-------------------------	------------------------	--	---


CM403RA-S

12" LED SURFACE MOUNT
WITH DECORATIVE DOUBLE RING TRIM



Fixture Type
Project
Notes

DIMENSIONAL DRAWINGS




DIMENSIONS

A	3-3/4"	95 mm
B	12"	306 mm

INSTALLATION

J-BOX

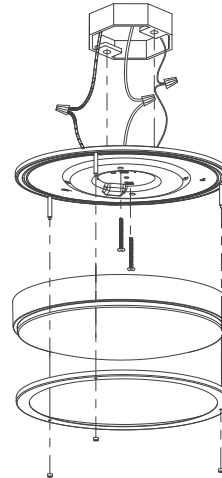

Each Box includes:

- 12" Disk Light
- 2 J-box Screws
- 3 Wire Nuts

COMPATIBLE DIMMERS

LEVITON	6681, 6672
LUTRON	PD-6WCL, DVCL-153P, CTCL-153P, MACL-153M, TGCL-153P